



UBX-R52 series



Multi-band LTE-M / NB-IoT / satellite chipset

Ubiquitous connectivity redefined with LTE-M / NB-IoT and satellite communication

- Multi-mode cellular and satellite modem for connectivity anywhere
- Compliant with 3GPP Release 17 NTN
- Power-optimized and cost-effective positioning with SpotNow receiver
- Easy integration with u-blox GNSS products and operation of LTE-based positioning
- Powerful edge computing platform provides a hosted application environment

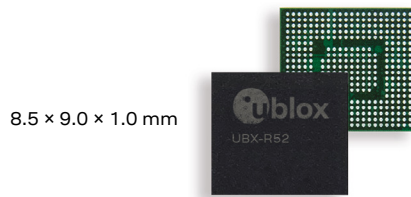

UBX-R52

Grade	
Automotive	
Professional	•
Standard	
Regions	Global
Access Technology	
LTE bands	*
Data rate	M1/NB2
Satellite protocol	proprietary / NB-IoT over NTN
Satellite bands	L-band / S-band
Positioning	
SpotNow	•
Compatible u-blox services	
AssistNow™	•
CellLocate®	•
CloudLocate™	•
Interfaces	
UART	•
USB (for diagnostics)	•
DDC (I2C)	•
SDIO (host)	•
ADC	•
PWM	•
I2S	•
GPIO	•
SAT RF IN	•
GPS RF IN	•
Features	
Open CPU (uCPU)	•
u-blox Smart Connection Manager	•
Ultra low PSM	•
Secure boot, updates, and production	•
HTTP, FTP	•
TCP/UDP	•
TLS/DTLS	•
CoAP and LwM2M	•
FW update via serial (FOAT)	•
uFOTA™	•
Last gasp	•
Jamming detection	•
Antenna and SIM detection	•
CellTime™	•

Product description

UBX-R52 is a multi-band / multi-mode chipset supporting two different categories of telecommunication standards: cellular LTE-M / NB-IoT and satellite.

The UBX-R52 series has been designed to offer low-power wide-area (LPWA) and satellite communication to applications requiring ubiquitous connectivity like mission-critical IoT assets, critical infrastructures, vehicle monitoring and control, or devices that transmit critical information.

Due to the high degree of software configurability within the fourth generation, in-house, VSP-based modem processor, the UBX-R52 offers unparalleled flexibility and future-proofness ensuring platform stability and longevity to customer devices.

UBX-R52 is based on a service-on-chip architecture, which offers low-level insights and data points from deep within the hardware, such as event-based energy consumption monitoring. The chipset can easily be combined with any u-blox GNSS product.

The UBX-R52 chipset has two RF pathways, baseband, power management, and RAM. It supports several power-saving cellular functionalities, such as PSM and eDRX, thus extending the service life for battery-powered applications.

* = All bands within the 450 MHz to 2.46 GHz range NB2 = Cat NB2 (125 kbit/s DL, 140 kbit/s UL) M1 = LTE Cat M1 (588 kbit/s DL, 1200 kbit/s UL)

UBX-R52 series



Features

LTE standards	3GPP Releases: 13, 14 (partial support), 15 (partial support), and 17 (partial support) for LTE Cat M1 and LTE Cat NB2 Cat M1 Half-duplex, 588 kb/s DL, 1200 kb/s UL Cat NB2 Half-duplex, 125 kb/s DL, 140 kb/s UL
LTE channels	375 kb/s UL/DL HD-FDD PDSCH modes (TM) 1, 2 MPDCCH SMS over SGS RAN overload control for MTC – extended access barring R11 Coverage extension A, B I-DRX, C-DRX, PSM
Satellite	Proprietary protocol or 3GPP rel.17 NB-IoT over NTN
Security	Secure boot, secure update, secure production
Positioning	External GNSS or SpotNow
Cellular bands	Software selectable HD-FDD band configurations enables single hardware SKU supporting all 3GPP bands from 450 MHz to 2.46 GHz, depending on external components
Satellite bands	L-band (~1.5 - 1.7 GHz) S-band (~2.0 - 2.2 GHz)
Application CPU	Industrial grade

Interfaces

Serial	UART USB SPI DDC (I2C) SDIO (host) 4-bit ADC PWM I2S
GPIO	Up to 15 GPIOs, configurable
SIM	ISO 7816-3
GNSS	1 Time sync

Package

FCBGA package	8.5 x 9.0 x 1.0 mm 395 pins
Pitch	0.4 mm

Environmental data, quality & reliability

Operating temperature	-40 °C to +85 °C (AEC-Q100 certified)
Storage temperature	TBD
RoHS compliant (lead-free) and green (no halogens)	
Manufactured in ISO/TS 16949 certified production sites	

Certifications and approvals

Module dependent

Electrical data

Power supply	Range 3.3 V to 4.4 V
Power consumption	LTE-M Mode: 0.5 µA in idle/PSM 180 µA in active idle SAT Mode: TBD

Product variants

UBX-R52	u-blox LTE-M, NB-IoT, and satellite chipset for global use
---------	--

Further information

For contact information, see www.u-blox.com/contact-u-blox.

For more product details and ordering information, see the [product data sheet](#).

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.