


# ZED-F9K-00B module



## High precision dead reckoning with integrated IMU sensors

### Continuous lane accurate positioning under the most challenging conditions

- Decimeter level accuracy for automotive mass markets
- Ideal for ADAS, V2X and head-up displays
- Turnkey multi-band RTK solution with built-in inertial sensors
- Low latency position update rate of up to 30 Hz

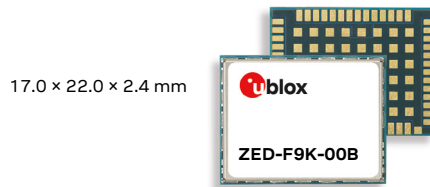

### Product description

The ZED-F9K-00B module features the u-blox F9 GNSS receiver to provide continuous decimeter-level positioning accuracy in the most challenging automotive use cases. The wide bandwidth of the multi-band receiver and its ability to simultaneously use all four GNSS constellations enables it to receive many satellite signals even in cities. This brings the highest availability of RTK solutions, everywhere and convergence time within seconds.

It is the first dead reckoning module with an integrated inertial measurement unit (IMU) capable of high precision positioning. The sophisticated built-in algorithms cleverly fuse the IMU data, GNSS measurements, wheel ticks, and vehicle dynamics model to provide lane accurate positioning where GNSS alone would fail. The module operates under open-sky motorways, in the wooded countryside, in difficult urban environments, and even in tunnels and underground parking. In modern automotive applications, such as an advanced driver assistance system (ADAS) to improve road safety, ZED-F9K-00B is the ultimate solution.

The device is a self-contained solution, which provides the best possible system performance to address latency constraints, RF front-end design issues, RTK algorithm integration, etc. This eliminates the technical risk and effort of selecting and integrating RF components and third party libraries like positioning engines. The u-blox approach also dramatically reduces supply chain complexity during production.

ZED-F9K-00B is ideal for innovative automotive designs with space and power limits. The module can be easily integrated into a telematics control unit (TCU), navigation system, ADAS or V2X electronic control unit (ECU). The module reaches a high navigation rate of up to 30 Hz with low latency suitable for real time applications to provide a lag-free user experience. ZED-F9K-00B modules are manufactured in ISO/TS 16949 certified sites and are fully tested. Qualification tests are performed as stipulated in the ISO 16750 standard: “Road vehicles – Environmental conditions and testing for electrical and electronic equipment”.

ZED-F9K-00B

<b>Grade</b>	
Automotive	
Professional	•
Standard	
<b>GNSS</b>	
GPS / QZSS	•
GLONASS	•
Galileo	•
BeiDou	•
Number of concurrent GNSS	4
Multi-band	•
<b>Interfaces</b>	
UART	2
USB	1
SPI	1
DDC (I2C compliant)	1
<b>Features</b>	
Programmable (Flash)	•
Additional SAW	•
RTC crystal	•
Oscillator	T
RTK rover	•
RTK base station	
Timepulse	1
<b>Power supply</b>	
2.7 V – 3.6 V	•

T = TCXO

# ZED-F9K-00B module



## Features

Receiver type	184-channel u-blox F9 engine GPS L1C/A L2C, GLO L1OF L2OF, GAL E1B/C E5b, BDS B1I B2I, QZSS L1C/A L2C	
Nav. update rate	up to 30 Hz	
Position accuracy	RTK	< 0.2 m + 1 ppm CEP
ADR position error	< 2% of distance travelled without GNSS	
Convergence time	RTK	< 10 s
Acquisition	Cold starts	24 s
	Aided starts	4 s
	Reacquisition	2 s
Sensitivity	Tracking & nav. <sup>1</sup>	-160 dBm
	Cold starts	-147 dBm
	Hot starts	-158 dBm
Built-in	TCXO, RTC, flash memory, 3D accelerometer, 3D gyroscope, diplexer, SAW filters	
Supported antennas	Active	

1 Limited by firmware for best DR performance

## Software features

Assistance	AssistNow Online OMA SUPL & 3GPP compliant	
Anti-jamming	Active CW detection and removal Onboard band pass filter	
Anti-spoofing	Advanced anti-spoofing algorithms	
Raw data	Code and Doppler measurements and IMU data	
Protocols	NMEA, UBX binary, RTCM version 3.3	

## Interfaces

Serial interfaces	2 UART
	1 USB
	1 SPI (optional)
	1 DDC (I2C compliant)
Digital I/O	Configurable timepulse
Timepulse	Configurable: 0.25 Hz to 10 MHz

## Package

54-pin LGA (Land Grid Array)  
17 x 22 x 2.4 mm

## Environmental data, quality & reliability

Operating temp.	-40 °C to +85 °C
Storage temp.	-40 °C to +85 °C
RoHS compliant (lead-free, 2015/863/EU)	
Green (halogen-free)	
EU Radio Equipment Directive compliant 2014/53/EU	
Qualification according to ISO 16750	
Manufactured and fully tested in ISO/TS 16949 certified production sites	
Uses u-blox F9 chips qualified according to AEC-Q100	

## Electrical data

Supply voltage	2.7 V to 3.6 V
Power consumption	85 mA @ 3.0 V (continuous)
Backup supply	1.65 V to 3.6 V

## Support products

C100-F9K	Easy to use evaluation board with various communication interfaces for correction services
----------	--

## Product variants

ZED-F9K-00B	u-blox F9 multi-band high precision dead reckoning, professional grade
-------------	--

## Further information

For contact information, see [www.u-blox.com/contact-u-blox](http://www.u-blox.com/contact-u-blox).

For more product details and ordering information, see the product data sheet.

## Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit [www.u-blox.com](http://www.u-blox.com).