


JODY-W3 series



Host-based modules with Wi-Fi 6 and Bluetooth 5.3

Automotive and professional grade modules featuring Wi-Fi 802.11ax and Bluetooth LE 5.3

- Wi-Fi 6 (802.11ac/ax)
- Wi-Fi Concurrent dual-band (2.4 and 5 GHz), 2x2 MIMO
- Full-featured Bluetooth 5.3 BR/EDR and LE, including long range
- Simultaneous access point (AP), station (STA), Wi-Fi Direct (P2P)
- Optimized for parallel operation of Wi-Fi and Bluetooth

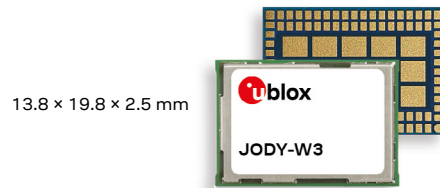

Product description

JODY-W3 Wi-Fi/Bluetooth modules are intended for the most advanced in-car infotainment and connectivity systems. The modules deliver the highest data rates in Wi-Fi using the most advanced Wi-Fi 802.11ax technology. JODY-W3 can operate in concurrent dual-band Wi-Fi 2.4 and 5 GHz, dual-MAC, and in 2x2 MIMO. It supports Bluetooth 5.3 BR/EDR and LE features, such as a data rate of 2 Mbit/s (PHY), extended advertising, and long range.

JODY-W3 modules are based on the AEC-Q100-qualified NXP Q9098 chip. They undergo extended automotive qualification according to AEC-Q104 and are manufactured in line with ISO/TS 16949. The JODY-W3 host-based modules require a host processor running a Linux or Android operating system. They connect to the host processor through various interfaces: PCIe or SDIO for Wi-Fi, high speed UART for Bluetooth, and PCM or I2S for Bluetooth audio.

Key features

- 2x2 MIMO or 1x1 SISO 802.11ax 5 GHz, beamforming
- Wi-Fi concurrent dual band 2.4 and 5 GHz
- Wi-Fi data rates (PHY): Up to 1.2 Gbit/s (5 GHz)
- Wi-Fi 20, 40, and 80 MHz channels
- DFS master zero-wait
- Multi-role operation: AP, STA, P2P
- Security: WPA3, all common methods of security and encryption
- Bluetooth LE physical layer (PHY) data rates up to 2 Mbit/s
- Bluetooth long range
- Advertising extension, high duty cycle directed advertising
- All standard pairing, authentication, link key, and encryption operation

	JODY-W354	JODY-W374	JODY-W377
Grade			
Automotive	•	•	•
Professional	•	•	•
Standard			
Radio			
Chip inside	NXP AW690	NXP Q9098	
Bluetooth qualification		v5.3	
Bluetooth profiles		HCI	
Bluetooth BR/EDR	•	•	•
Bluetooth Low Energy	•	•	•
Wi-Fi IEEE 802.11 standards		Wi-Fi 6 (802.11ax)	
Wi-Fi 2.4 / 5 [GHz]		2.4 and 5	
LTE filter	•	•	
Bluetooth output power conducted [dBm]	10	10	10
Wi-Fi output power conducted [dBm]	19	19	19
Antenna type	2p	2p	3p
OS support			
Android / Linux drivers (from u-blox)	•	•	•
Interfaces			
UART ^B	1	1	1
PCIe ^W	1	1	1
SDIO [version] ^W		v3 ^W	v3 ^W
PCM / I2S (Bluetooth audio)	1	1	1
Features			
Micro Access Point [max connects]	2 x 32	2 x 32	2 x 32
AES hardware support	•	•	•
Wi-Fi direct	•	•	•
RF parameters in OTP memory	•	•	•
MAC addresses in OTP memory	•	•	•
Simultaneous STA/AP roles	dual-MAC	dual-MAC	dual-MAC
Concurrent dual band	•	•	•

2p = 2 antenna pins, one each for Bluetooth and Wi-Fi
 3p = 3 pins, 2 for Wi-Fi and 1 for Bluetooth antenna
 DRCS = Dynamic Rapid Channel Switching

B = For Bluetooth only
 W = For Wi-Fi only

JODY-W3 series



Features

Wi-Fi standards	IEEE 802.11a/b/g/n/ac/ax IEEE 802.11d/e/h/i/k/r/u/v/w/mc
Wi-Fi channels	2.4 GHz: 1-13 5 GHz: 36-165
Bluetooth	v5.3 (Bluetooth Low Energy and Bluetooth with EDR) Class 1 and 2 transmission Bluetooth Low Energy long range
Antenna	JODY-W354 and JODY-W374: Pin 1: 2.4 GHz and 5 GHz Wi-Fi Pin 2: 2.4 GHz Wi-Fi and Bluetooth JODY-W377: Pin 1: 2.4 GHz and 5 GHz Wi-Fi Pin 2: 2.4 GHz and 5 GHz Wi-Fi Pin 3: Bluetooth
Output power	Wi-Fi IEEE 802.11b: 19 dBm Wi-Fi IEEE 802.11a/g: 17 dBm Wi-Fi IEEE 802.11n/ac/ax: 14-16 dBm Bluetooth BR/EDR: 10 dBm Bluetooth LE: 7 dBm
Security	Hardware encryption engine: AES-CCMP, AES-GCMP, TKIP WPA/WPA2/WPA3, WAPI, WEP 128-bit AES hardware support

Software features

RF parameters	Available in on-board OTP memory
MAC addresses	Available in on-board OTP memory
Operation modes	Station (STA) Access Point (AP) Wi-Fi Direct P2P Combinations of STA, AP, P2P
Driver support	Linux drivers in source code

Interfaces

Wi-Fi	PCIe SDIO v3.0 (JODY-W374 and JODY-W377 only)
Bluetooth	High-speed UART, 4-wire
Bluetooth audio	PCM audio, I2S
Other interfaces	GPIOs

Package

Dimensions	13.8 × 19.8 × 2.5 mm
Mounting	Solder pins (LGA), 94 pins, additional large ground pins

Environmental data, quality & reliability

Operating temperature	-40 °C to +85 °C
Automotive qualification according to u-blox Qualification Policy based on AEC-Q104	

Electrical data

Power supply	3.3 V and 1.8 V
I/O power supply	3.3 V or 1.8 V

Certifications and approvals

Type approvals	Europe (ETSI RED); US (FCC CFR part 15C and 15E); Canada (ISED)
Bluetooth qualification	v5.3 (Bluetooth BR/EDR and Bluetooth low energy)

Support products

EVK-JODY-W374	Evaluation kit for JODY-W374
EVK-JODY-W377	Evaluation kit for JODY-W377

Product variants

JODY-W354	2 antenna pins, 85 °C
JODY-W374	2 antenna pins, 85 °C
JODY-W377	3 antenna pins, 85 °C

Further information

For contact information, see www.u-blox.com/contact-us.

For more product details and ordering information, see the [product data sheet](#).

Legal Notice:

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.
Copyright © 2022, u-blox AG